

UF3


Monitoring and phase loss / reversal relay

Description

- > Self-extinguished material V0.
- > Compact size - 1 module - 17.5mm.
- > Output relay 1 pole changeover contact.
- > DIN rail mounting EN50022.
- > Universal three-phase supply 200...450 VAC.



Wiring




Specifications

Power supply	3x200...450 VAC
Frequency range	47...63 Hz
Power consumption	1,9 W
Output relay	8 A, 250 VAC / 24 VDC
Working temperature	-10 ... +50 °C
Indication	Supply (green) Relay (red)
Protection	IP20
Weight	60 g
Dimensions	98 x 17,5 x 64 mm



WARNING

CHECK THE CONNECTIONS BEFORE STARTING THE EQUIPMENT. AN ERROR THEREOF MAY INVOLVE ELECTRIC SHOCK HAZARD.

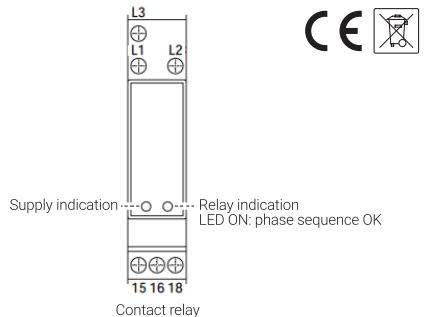

Operation

